



Staple type: KL 6000  
 18 GAUGE STAPLES NARROW CROWN  
 Wire Ø: 1.18mm

### Suitable for the following tools\*:

haubold PN 6040 (L1)  
 PN 6040 A  
 Paslode MDS 1830 / 1840  
*\*please check staple length compatibility with each tool before use*


Staple lengths available: 30mm  
 Staples per strip: 104

For fixing of non load-bearing gypsum plasterboard systems onto timber



### CORROSION PROTECTION

Finish	Usage Environment	Label Colour on Packaging
Zinc Galv 3µm	Service Class 1 INDOOR	Blue

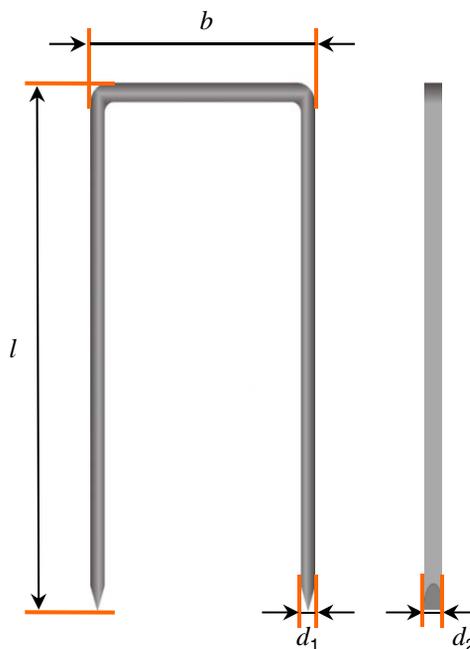

EN 14566:2008  
 +A1:2009

DIN 18182-A



Chisel Point  
 "C"

### STAPLE PROPERTIES / DIMENSIONS

Tensile strength of wire: min 900 N/mm<sup>2</sup>  
 Nominal diameter (d): 1.18mm  
 Flattened wire dimension: (d<sub>1</sub>): 1.00mm  
 (d<sub>2</sub>): 1.25mm  
 Outside crown width (b): 5.70mm  
 Strip length: approx 128.00mm  
 Standard point: "C"  
 Coated leg length: Full

### RECOMMENDED EDGE DISTANCES

ITW recommended minimum edge distances:

Tapered Edge Plasterboard = 10mm  
 Cut Edge Plasterboard = 15mm

For more comprehensive information please contact your gypsum board manufacturer.

### STAPLE LENGTHS AVAILABLE

Finish	Lengths Available
Zinc Galv 3µm	30mm

haubold is a brand of the ITW Group. ITW reserves the right to change specification without notice. All design using this data should be carried out by a qualified structural engineer, subject to relevant National and European standards or regulations.